

★AVIO- Q14 2001-026710/04 ★EP 1057725-A2
Aircraft passenger seat with reclining mechanism providing cradle motion, has mechanism causing forward portion to slide simultaneously with forward sliding of back portion and of seat (Eng)

AVIOINTERIORS SPA 1999.06.02 1999IT-RM0349

Q25 (2000.12.06) B64D 11/06, B60N 2/02

2000.03.17 2000EP-830199 R(AL AT BE CH CY DE DK ES FI FR GB GR
IE IT LI LT LU LV MC MK NL PT RO SE SI)

Novelty: The chair has a back portion, a seat portion, a basic frame, and a mechanism for the forward sliding of front portion simultaneously with the forward sliding of the back portion of the seat portion. The mechanism comprises of slots (5, 6, 7) on the basic frame adjacent the back and seat portions, and pins (8, 9, 12, 13) on the back and seat portions, slidably coupled along the slots, in such a way to allow to the chair to reach any position. Motion of the chair is achieved by means of a motorized mechanism.

Use: As a reclining aircraft seat.


Advantage: May be used both of economy class-type chairs, where space is limited, as well as on business class type chairs.

Description of Drawing(s): The drawing shows a lateral schematic view of the chair in an upstanding position.

Slots 5, 6, 7

BEST AVAILABLE COPY

Pins 8,9,12,13
(13pp Dwg.No.1/4)
N2001-020897

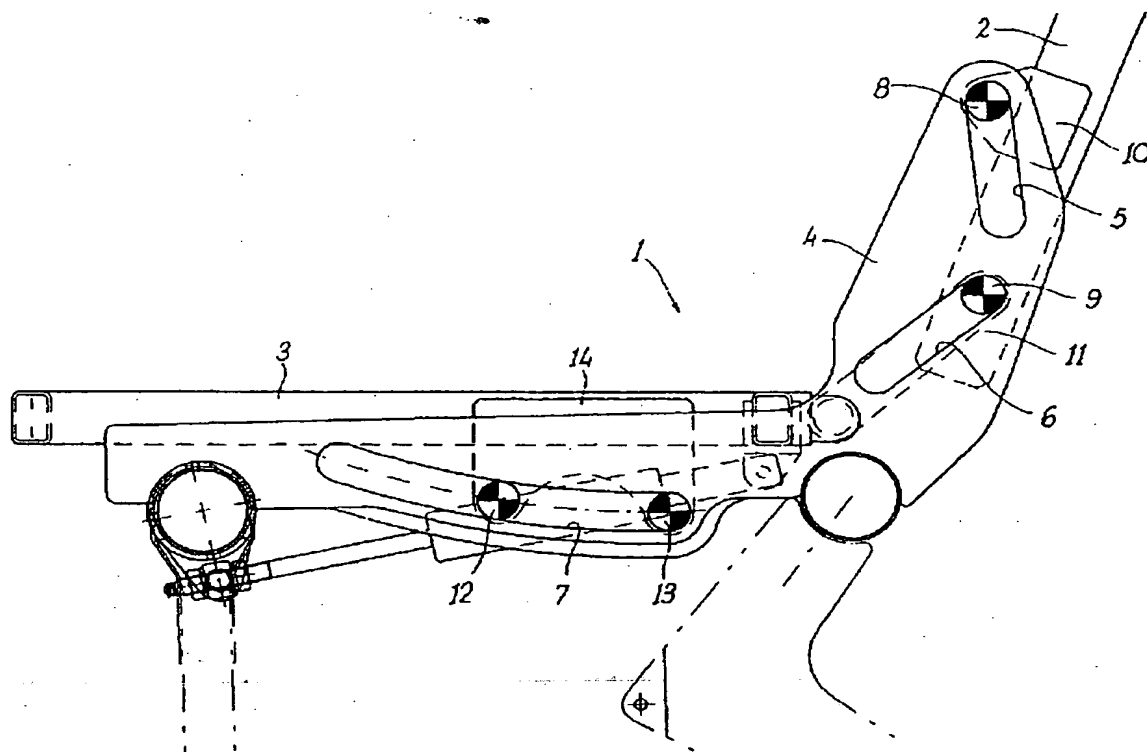

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 057 725 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

06.12.2000 Bulletin 2000/49

(51) Int Cl.7: B64D 11/06, B60N 2/02

(21) Application number: 00830199.6

(22) Date of filing: 17.03.2000

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(72) Inventor: Veneruso, Alberto

04013 Latina (IT)

(74) Representative: Iannone, Carlo Luigi et al

Ing. Barzanò & Zanardo Roma S.p.A.

Via Piemonte, 26

00187 Roma (IT)

(30) Priority: 02.06.1999 IT RM990349

(71) Applicant: AVIOINTERIORS S.P.A.


I-04013 Tor Tre Ponti Latina (IT)

(54) Reclining mechanism for aircraft passenger seat

(57) The invention concerns a chair with improved cradle motion, particularly for aircrafts; said chair providing a back portion (2, 2'), a seat portion (3, 3'), a basic frame (4, 4'), the chair being characterised in that means

(5, 6, 7, 8, 9, 12, 13, 5', 6', 7', 8', 9', 12', 13') are provided for the forward sliding contemporaneously with the forward sliding of the back portion (2, 2') and of the seat portion (3, 3').

FIG. 1

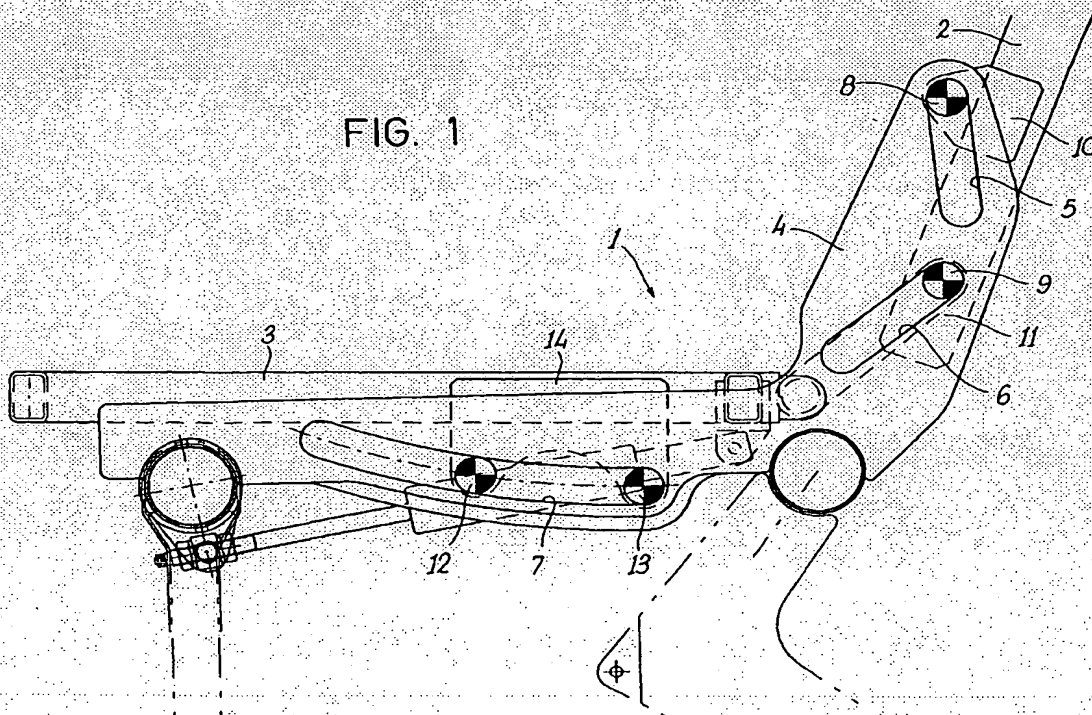

EP 1 057 725 A2

1

EP 1 057 725 A2

2

Description

[0001] The present invention relates to a chair with improved cradle motion, particularly for aircrafts.

[0002] More specifically, the invention relates to an economy and/or business chair, provided with a mechanism allowing to obtain on the same chair a so called cradle motion.

[0003] The solution suggested according to the invention can be obviously employed also on a different kind of vehicles.

[0004] As it is well known, nowadays, chairs employed in the economy class of the aircrafts are mainly provided with a rotation motion of the back about a fixed point (reclining motion), while the seat remains fixed, or can have a motion connected with the motion of the back.

[0005] In this way, in order to try to give to the passenger the best comfort, it is reduced the space available for the passenger of the rear seat.

[0006] In chairs employer for upper classes, it has been tried to realise a so called cradle motion, that, besides allowing to obtain a decidedly more comfortable position for the user of the seat, should allow not to interfere with the space available for the other passengers.

[0007] It must be further born in mind that in Business class space problems do not exist, which are typical of the economy class.

[0008] However, all the solutions already known do not give good results under the technical and functional point of view.

[0009] Particularly, under a technical point of view it has not been possible to realise up to day an economy class chair provided with a cradle motion.

[0010] Therefore, it does not exist any solution allowing to realise a cradle motion chair, provided on the rear with an openable table.

[0011] Business class chair presently used can have this kind of motion since the table is provided on the arm rest of the chair.

[0012] Furthermore, known solutions that are used for the Business class provide the cradle motion with the forward translation of the seat and of the back, while the frame of the back remains fixed in the original position, in such a way not to reduce the space of the passenger who is seated behind the chair.

[0013] This kind of solution is obviously possible, even if not optimum, for the Business class, since, beside the above mentioned problem of the table, there is a huge of space available, but the same cannot be used for economy class chairs, since there is few available space and the table must be provided just behind the back or the other chair.

[0014] Therefore, up to date it has not been realised a solution allowing to have a chair with cradle motion the back of which inclines integrally with its frame and wherein the same back is provided with a table not in-

fluenced by the above mention cradle motion.

[0015] Furthermore, the known solutions cannot be used both for economy and business class chairs.

[0016] These and other results are obtained according to the invention suggesting a technical solution allowing to make the cradle motion of the chair, involving both the back and the seat of the chair.

[0017] It is therefore specific object of the present invention a chair with improved cradle motion, particularly for aircrafts, said chair providing a back portion, a seat portion, a basic frame, the chair being characterised in that means are provided for the forward sliding contemporaneously with the forward sliding of the back portion and of the seat portion.

[0018] Preferably, according to the invention, said means for the forward sliding contemporaneously with the forward sliding of the back portion and of the seat portion are comprised of slots realised on said basic frame in correspondence of said back and seat portions, pin means being provided on said back and seat portions, slidably coupable along said slots, in such a way to allow to the chair to reach any position.

[0019] In a preferred embodiment of the chair according to the invention, two slots are provided in correspondence of the back portion and a slot is provided in correspondence of the seat portion.

[0020] According to a further preferred embodiment of the chair according to the invention, two slots are provided in correspondence of the back portion and two slots are provided in correspondence of the seat portion.

[0021] Always according to the invention, the motion of said cradle can be manually obtained or it can be obtained by motorised means.

[0022] The present invention will be now described, for illustrative but not limitative purposes, according to its preferred embodiments, with particular reference to the figures of the enclosed drawings, wherein:

figure 1 is a lateral schematic view of an embodiment of an economy class chair according to the invention in an upstanding position;

figure 2 is a lateral schematic view of the chair of figure 1 in a reclined position;

figure 3 is a lateral schematic view of an embodiment of an Business class chair according to the invention in an upstanding position; and

figure 4 is a lateral schematic view of the chair of figure 3 in a reclined position.

[0023] Making reference to the figures 1 and 2, it is schematically shown the frame 1 of an economy class chair, comprising a back portion 2 and a seat portion 3.

[0024] In the position shown in figure 1, the two portions 2 and 3 are placed each other at a 90° degree position.

[0025] Said frame provides a lateral structure 4, that will be symmetrical and identical on the opposite side that cannot be seen from the figure, on which two ob-

3

EP 1 057 725 A2

4

lique slots 5, 6 are, in correspondence of the back portion 2 and a slightly curved slot 7, in correspondence of the seat portion 3.

[0026] On the back portion 2 two pins 8, 9 are provided, said pins 8, 9 being coupled to said portion 2 by support plates 10, 11, provided in such a way to be able to freely slide along said slots 5, 6, assuming any position between the two end positions shown in figures 1 and 2, respectively.

[0027] In the same way, on said seat portion 3 two pins 12 and 13 are provided, said pins 12, 13 being coupled to said portion 3 by the support plate 14 provided in such a way to be able to freely slide along said slot 7, assuming any position between the two end positions shown in figures 1 and 2, respectively.

[0028] The solution according to the invention allows to incline the chair without reducing the space available for the passenger on the seat behind, or in any case with a much lower reduction of the same with respect to what happen with the present solutions.

[0029] By the operation of suitable actuating, manual or motorised means, which are not part of the present invention and therefore will be not described in greater detail, the chair can be inclined, reaching the position of figures 1 and 2, or being it possible to stop the same in any intermediate position.

[0030] Coming now to observe figures 3 and 4, where-in the same numeral references followed by 'will be used to indicate similar parts, it is schematically shown the frame 1' of a business class chair, comprising a back portion 2' and a seat portion 3'.

[0031] In the position shown in figure 3, the two portions 2' and 3' are placed each other at a 90° degrees position.

[0032] Said frame provides a lateral structure 4', that will be symmetrical and identical on the opposite side that cannot be seen from the figure, on which two oblique slots 5', 6' are, in correspondence of the back portion 2' and two slightly curved slots 7' and 7", in correspondence of the seat portion 3'.

[0033] On the back portion 2' two pins 8', 9' are provided, said pins 8', 9' being coupled to said portion 2' by support plates 10', 11', provided in such a way to be able to freely slide along said slots 5', 6', assuming any position between the two end positions shown in figures 3 and 4, respectively.

[0034] In the same way, on said seat portion 3' two pins 12' and 13' are provided, said pins 12', 13' being coupled to said portion 3' by the support plate 14' and 14" provided in such a way to be able to freely slide along said slots 7', 7", assuming any position between the two end positions shown in figures 3 and 4, respectively.

[0035] The solution according to the invention allows to incline the chair without reducing the space available for the passenger on the seat behind, or in any case with a much lower reduction of the same with respect to what happen with the present solutions.

[0036] By the operation of suitable actuating, manual or motorised means, which are not part of the present invention and therefore will be not described in greater detail, the chair can be inclined, reaching the position of figures 3 and 4, or being it possible to stop the same in any intermediate position.


[0037] The present invention has been described for illustrative but not limitative purposes, according to its preferred embodiments, but it is to be understood that modifications and/or changes can be introduced by those skilled in the art without departing from the relevant scope as defined in the enclosed claims.

15 Claims


1. Chair with improved cradle motion, particularly for aircrafts, said chair providing a back portion, a seat portion, a basic frame, the chair being characterised in that means are provided for the forward sliding contemporaneously with the forward sliding of the back portion and of the seat portion.
2. Chair with improved cradle motion, particularly for aircrafts, according to claim 1, characterised in that said means for the forward sliding contemporaneously with the forward sliding of the back portion and of the seat portion are comprised of slots realised on said basic frame in correspondence of said back and seat portions, pin means being provided on said back and seat portions, slidably coupable along said slots, in such a way to allow to the chair to reach any position.
3. Chair with improved cradle motion, particularly for aircrafts, according to claim 1 or 2, characterised in that two slots are provided in correspondence of the back portion and a slot is provided in correspondence of the seat portion.
4. Chair with improved cradle motion, particularly for aircrafts, according to claim 1 or 2, characterised in that two slots are provided in correspondence of the back portion and two slots are provided in correspondence of the seat portion.
5. Chair with improved cradle motion, particularly for aircrafts, according to one of the preceding claims, characterised in that the motion of said cradle is obtained manually or it is obtained by motorised means.
6. Chair with improved cradle motion, particularly for aircrafts, according to each one of the preceding claims, substantially as illustrated and described.

EP 1 057 725 A2

FIG. 1

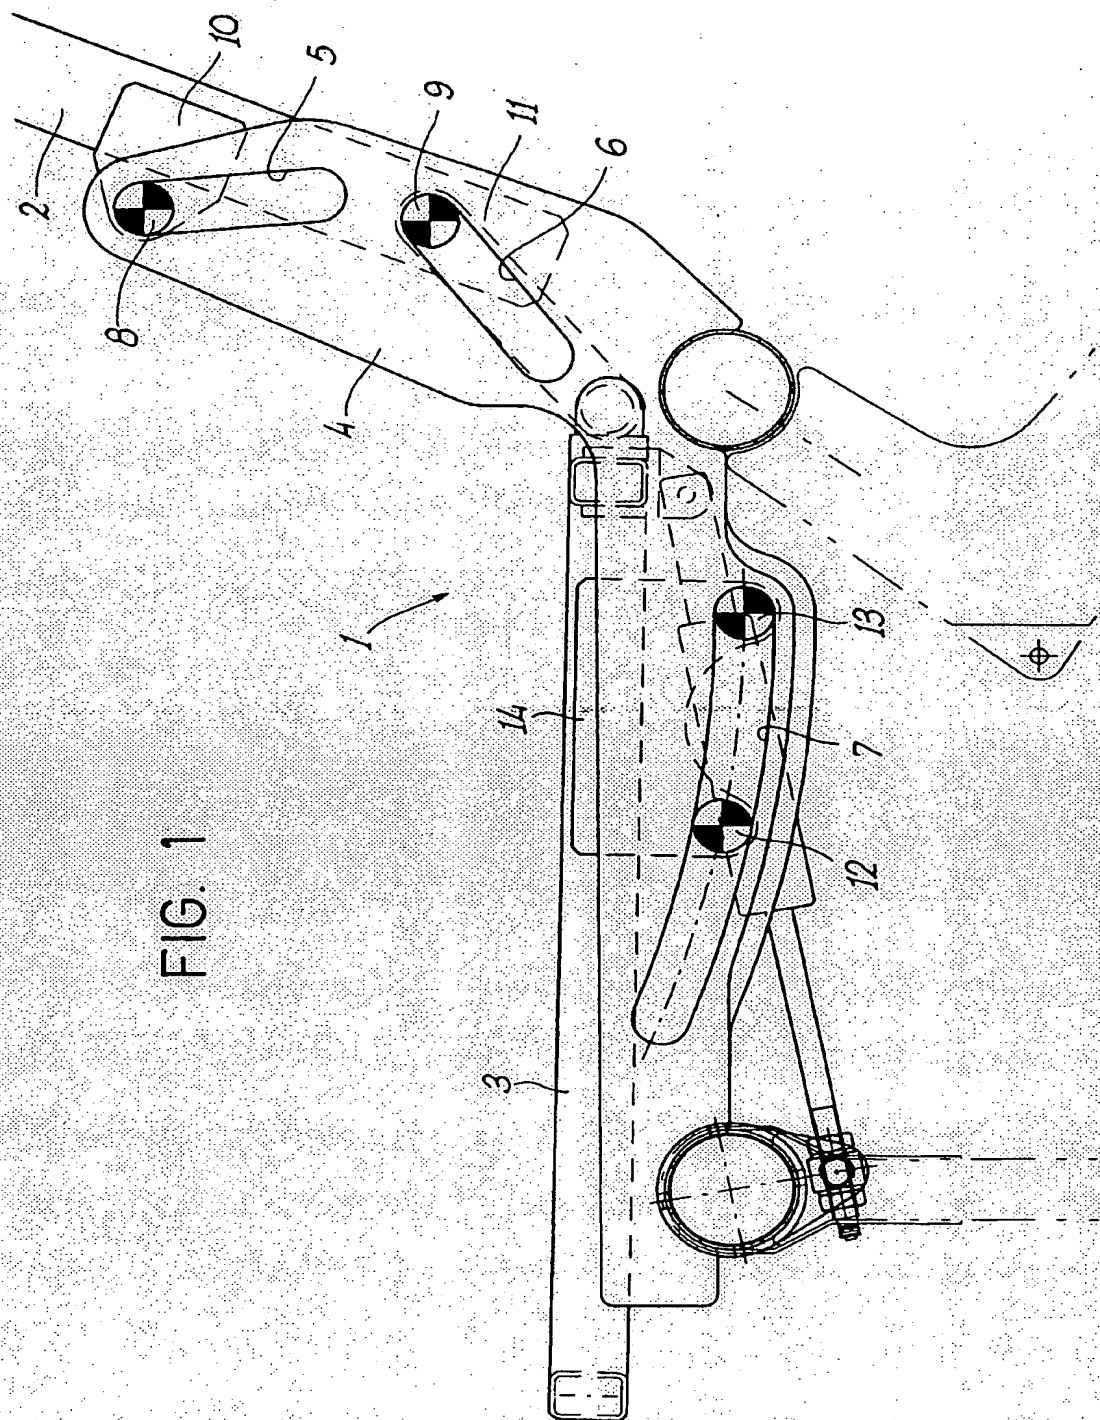

EP 1 057 725 A2

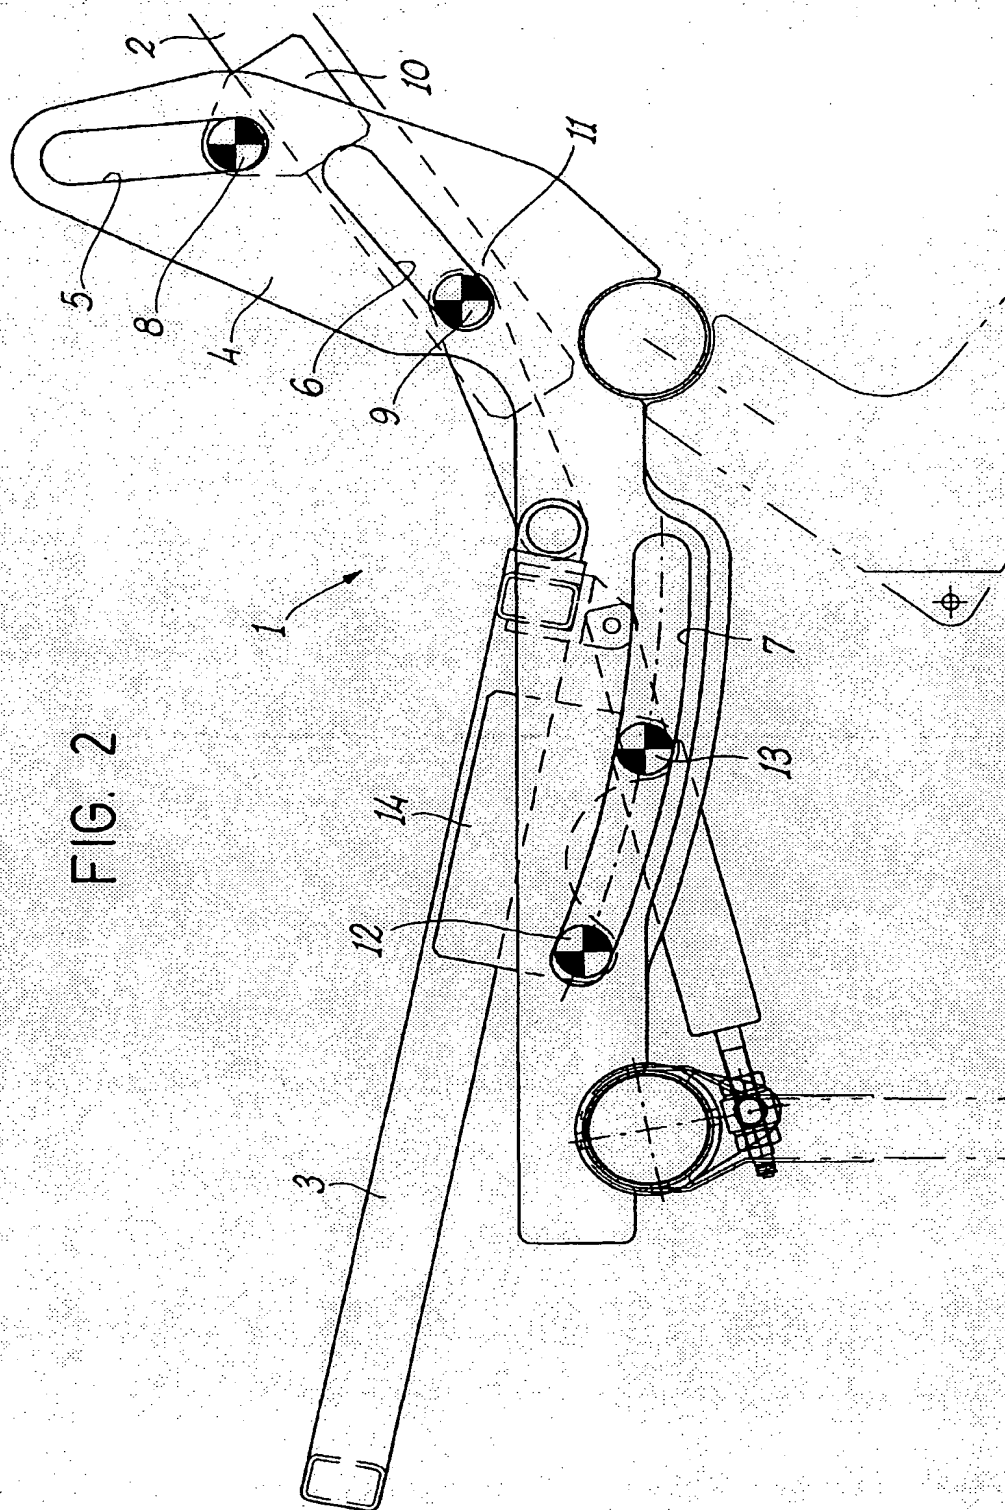

EP 1 057 725 A2


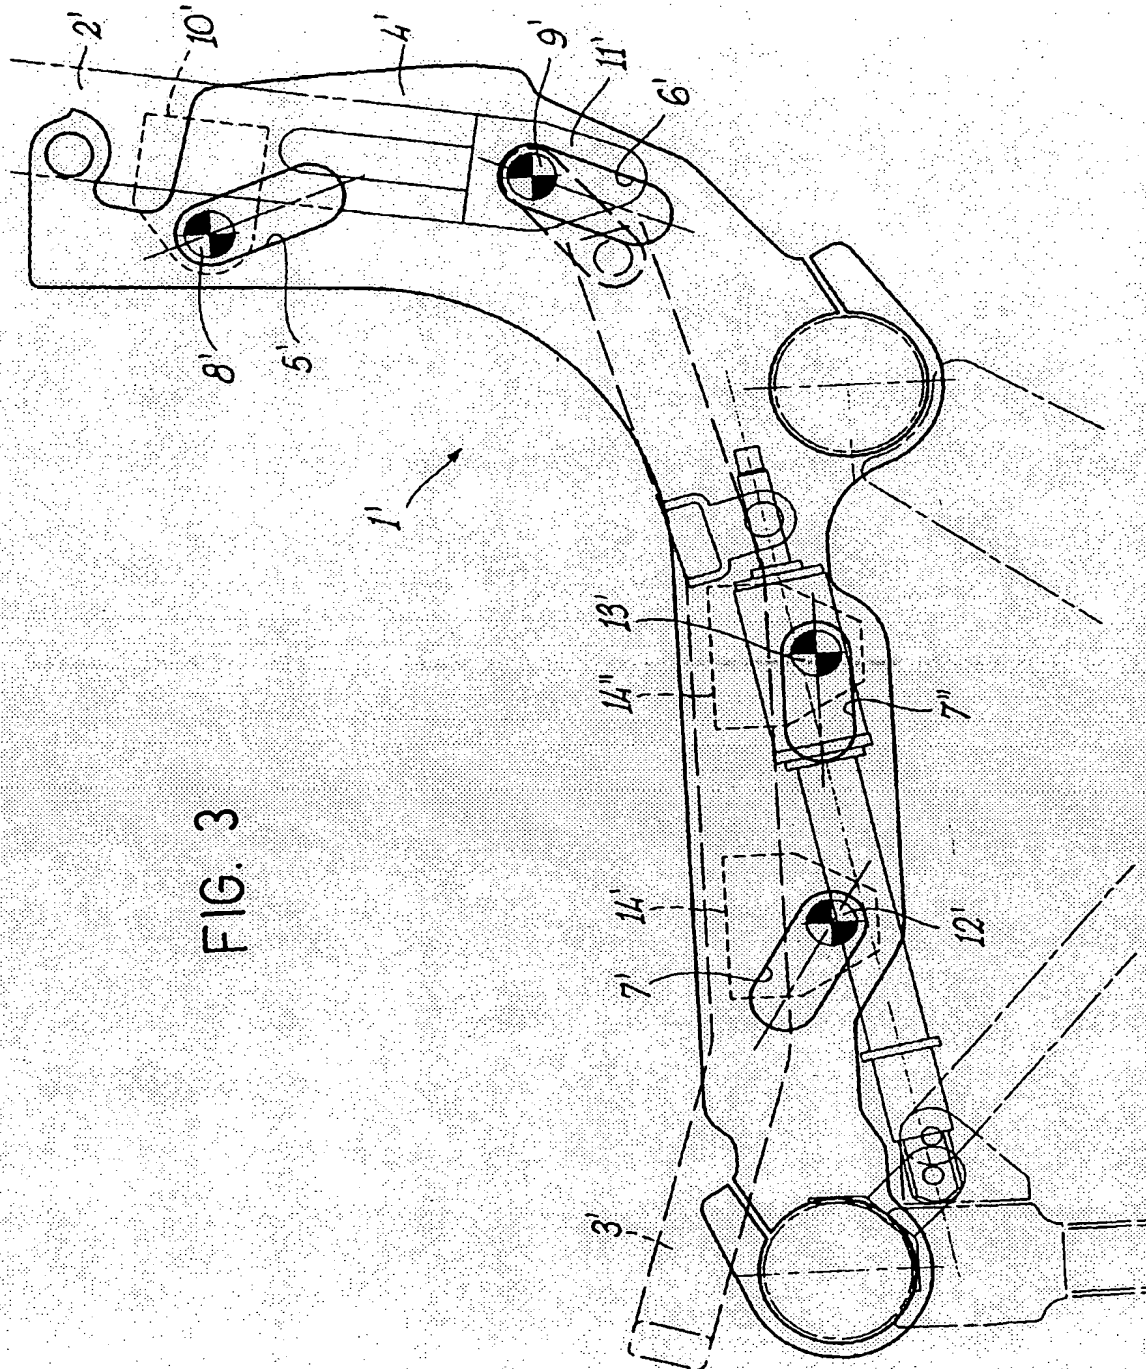


FIG. 3

EP 1 057 725 A2

FIG. 4

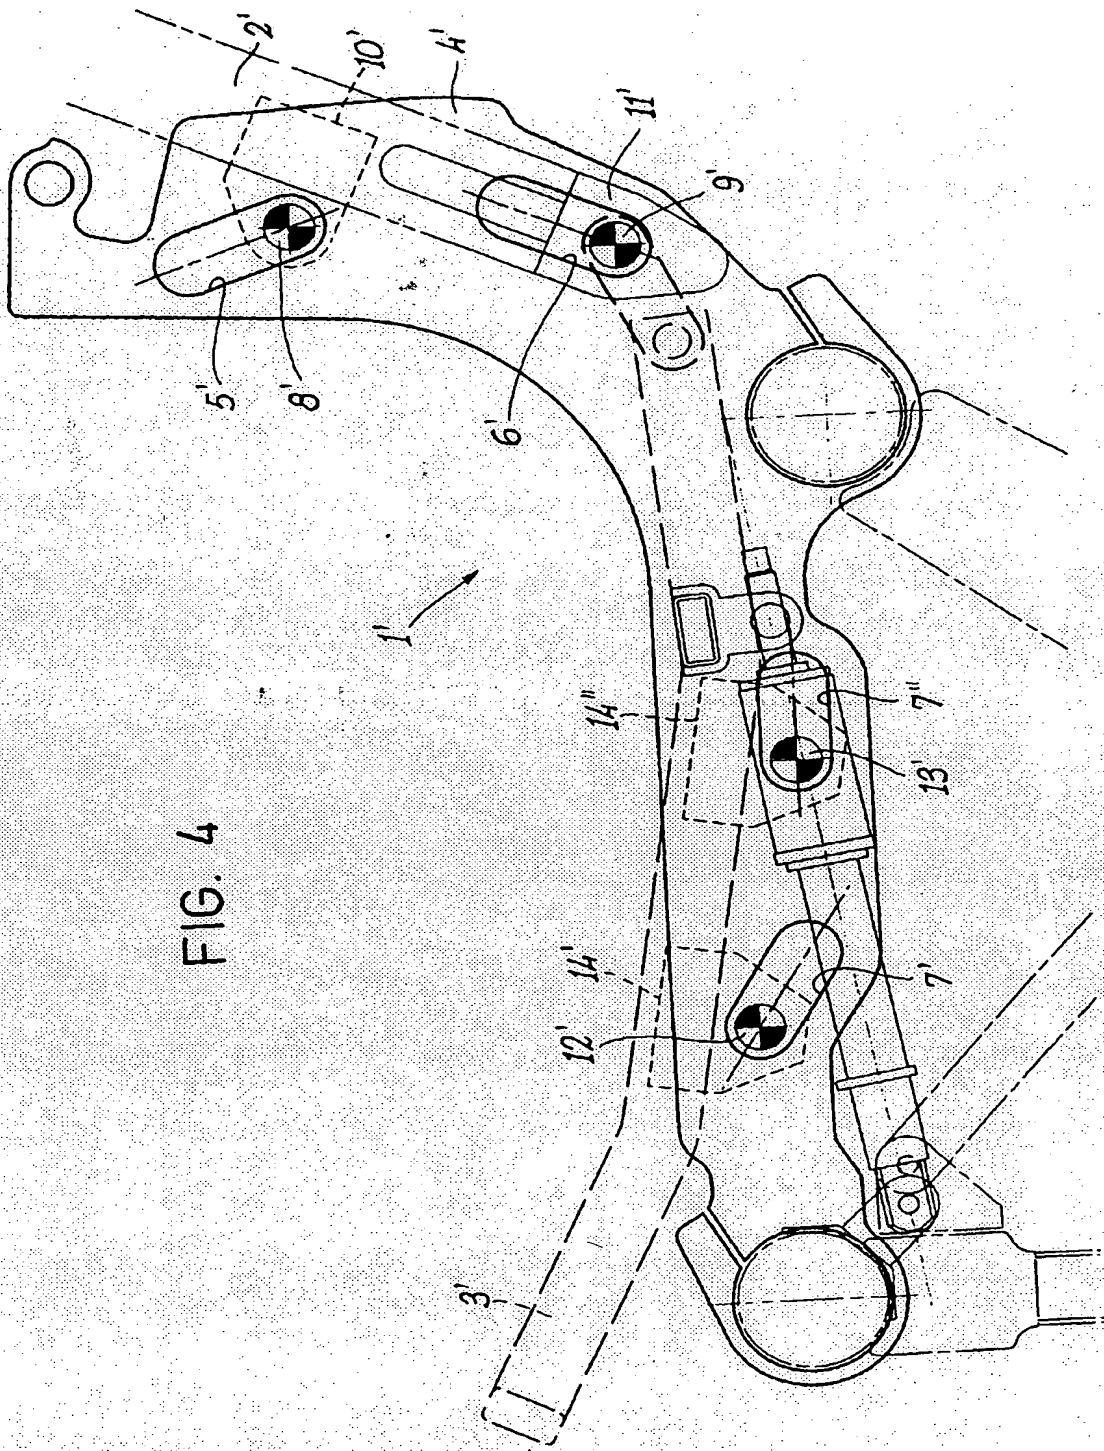

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.